

Aspect-based sentiment classification model employing whale optimized adaptive neural network

Balaganesh NALLATHAMBI^{*} and K. MUNEESSWARAN²

Department of Computer Science & Engineering, Mepco Schlenk Engineering College (Autonomous), Sivakasi, Tamilnadu, India

Abstract. In E-Commerce applications, nowadays the Aspect-based sentiment analysis has become vital, and every consumer started focusing on various aspects of the product before making the purchase decision through online portals like Amazon, Walmart, Alibaba, etc. Hence, the enhancement of sentiment classification considering every aspect of product and services is in the limelight. In this proposed research, Aspect Based Sentiment Classification model has been developed employing Sentiment Whale Optimized Adaptive Neural Network (SWOANN) for classifying the sentiment of key aspects of products and services. The accuracy of sentiment classification of the product and services has been improved by the optimal selection of weights of the neurons of proposed model. The promising results are obtained by analyzing the mobile phone review dataset when compared with other existing sentiment classification approaches such as Support Vector Machine (SVM), Artificial Neural Network (ANN). The proposed work uses the key features such as the Positive Opinion Score, Negative Opinion Score, and the Term Frequency-Inverse Document Frequency (TF-IDF) for representing each aspect of products and services, which further to improve the overall effectiveness of the classifier. The proposed model can be compatible with any sentiment classification problem of products and services.

Key words: aspect-based sentiment analysis; whale optimization algorithm; artificial neural network; opinion mining.

1. Introduction

As a major subtask in the field of Natural Language Processing (NLP), sentiment analysis has pulled in an ever-increasing number of researchers as it is applied to numerous real-world applications. It is broadly utilized in information mining, chatbots, recommendation frameworks [1] and even in the tourism industry [2]. Apart from the customers, it is also used by the manufactures of the product or rendering of service providers to analyze the customer sentiments and improve the quality of the product or service.

The set of reviews can be a document comprising of numerous sentences and passages or even a single sentence. Sentence-level and Document-level sentiment investigation extract a general sentiment for each sentence and document, individually but it is not adequate. In the sentence-level sentiment examination, the general polarity of the sentiment does not mirror the important features that are expected by the client [3]. There are multiple aspects in a single sentence having inverse polarities. For Example, the review “iPhone display is remarkable, but battery life is not up to the mark” implies “iPhone screen” is positive and “battery life” is negative. This shifts the focus on sentiment analysis from statement-level and document-level to Aspect-level [4].

Knowledge-based methods, Statistical methods and Hybrid approaches are the existing approaches for

carrying out Aspect Based Sentiment Analysis (ABSA). In the Hybrid sentiment analyzer, both the knowledge-driven and statistical models (machine learning) are used, which showcased better performance contrast with individual methodologies[5]–[12]. The machine learning based techniques develops the sentiment analysis model based on the training set and foresees the unlabeled information and automatically does the sentiment polarity separation.

Meta-heuristic algorithms inspired by nature and solve problems of optimization by mimicking biological or physical phenomena. The three major categories are Evolution based, physics-based, and swarm-based approaches. In Evolution-based approaches, the process begins with a randomly generated population and evolves over subsequent generations. Genetic Algorithms (GA) Genetic Programming (GP) are some of Evolution-based approaches. Physics-based methods imitate the physical rules in the universe. The most popular algorithms are Simulated Annealing (SA) [13] and Curved Space Optimization (CSO) [14]. Swarm-based algorithms preserve search space information over subsequent iterations, while as soon as a new population is formed, evolution-based algorithms ignore certain information. Swarm based algorithm has fewer operators and thus easier to implement compared to Evolution based approaches. This work presents the hybrid of both the knowledge based (Sentiwordnet, An Opinion Lexicon) and statistical model (Artificial Neural Network,

*e-mail: balaganesh@mepcoeng.ac.in

Optimization algorithm) for fine-tuning the aspect level sentiment classification. The purpose of the proposed research is to automate the product review analysis process. Both Manufacturers and Customers spend more time reading the reviews of the products to get insight on the quality of the product. Due to the exponential growth of the online portals, the process becomes hectic. This work can be integrated with the online portals or as a separate software package for performing automated review analysis in the field of e-commerce applications. For both Manufacturers and Customers, the review analysis task will be more accurate and faster to assess the quality of the product.

In the year 2016, the WOA algorithm was proposed by *SeyedaliMirjalili et al.*, a metaheuristic optimization algorithm which was inspired by nature [15]. In that work, they evaluated WOA by solving 29 mathematical optimization problems and 6 structural optimization problems. When compared to the state-of-the-art optimization methods and conventional methods, WOA method has proven to be very competitive. The hunting strategy of humpback whales is simulated, and the optimal solution is reached effectively bypassing the local optima.

T. Brychcinet et al. introduces supervised machine learning approaches and unsupervised semantic approaches for ABSA [16]. The methods outperformed *Semeval 2014* baseline results, but the accuracy measure indicates there is a scope for further improvement by reducing misclassification problem.

J. Singh et al. optimize the sentiment analysis task by introducing traditional machine learning algorithms [17]. They compared the algorithms and concluded OneR classification is better compared to Naïve Bayes, J-48 and BFTree but SVM was not considered. *AL-Smadi et al.* perform ABSA task on Arabic hotel reviews using deep Recurrent Neural Network (RNN) and SVM classifiers [18]. The performance results show SVM outperforms deep RNN in terms of classification accuracy. *P. Kalarani et al.* perform sentiment analysis task by extracting relevant features using firefly optimization algorithm [19]. The extracted features are fed as the input to both SVM and ANN classifiers and sentiment classification is experimented. The result shows ANN marginally outperforms SVM classifier.

In the year 2019, *L. Haghnegahdar et al.* develop a classification model [20] by combining ANN and Whale Optimization Algorithm (WOA) optimization algorithm for performing Intrusion detection on Smart Grids. The optimal weights of ANN are derived by using WOA optimizer and the model outperforms ANN, SVM, OneR and Naïve Bayes algorithms in terms of classification accuracy. According to the literature study and No Free Lunch (NFL) theorem, the Artificial Neural Network (ANN) and Support Vector Machine (SVM) are considered as the supervised machine learning model that uses to address the sentiment classification problem in a

more efficient way than the new technique such as a Deep Recurrent Neural Network (DRNN).

In this proposed research work, we have optimized the weight selection of ANN algorithm by using Whale Optimization Algorithm (WOA) and applied the same for product review analysis in the area of sentiment classification.

2. Proposed sentiment classification approach

Aspect-Based Sentiment Analysis (ABSA) is a fine-grained sentiment investigation task, which expects to foresee the sentiment polarities of the given target terms (aspects) in the text content [21], [22]. In this paper we have proposed an Aspect-Based Sentiment classification method using Machine Learning Algorithm for the product's (mobile phone) review.

This novel approach is categorized into the following steps,

- Data Aggregation: The mobile phone reviews (L1, L2, ... Ln) provided by various customers in websites such as Amazon, Walmart, Alibaba and Flipkart are aggregated as a collection of reviews in a List (L)
- Data Pre-processing: L is preprocessed into L¹
- Aspects Extraction: Important aspects (A) related to Mobile phone domain are extracted.
- Feature Extraction: From the preprocessed reviews (L¹) the Positive score, Negative score and Term Frequency Inverse Document Frequency (TF-IDF) for each aspect (A1, A2, ... Au) of the product is extracted and presented in a feature vector $F = \{F1, F2, \dots, Fv\}$
- Sentiment Classification by Whale Optimization Algorithm based Adaptive Artificial Neural Network (SWOANN): F is passed as Input to the SWOANN and sentiment (Positive or Negative) (Γ) of each aspect is classified.

The flow diagram of the proposed Aspect-Based Sentiment Classification System has been given in Fig. 1. In this novel approach, mobile phone reviews are the input data of the neural network. Also, Web scrapers are used to extract and aggregate the product reviews provided by the customers of the specific mobile phone model from the Amazon, Walmart, Alibaba and Flipkart websites.

- The following operations are carried out the aggregated product reviews for enhancing the accuracy of the sentiment classification system,

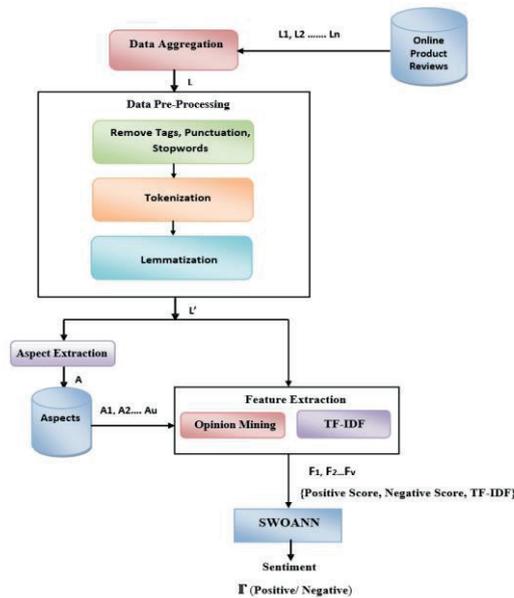


Fig. 1. Flow diagram of proposed aspect-based sentiment classification system

2.1.1 Data preprocessing

The noise and stop words are removed from the first stage of preprocessing then in the second stage, the text is normalized by means of tokenization and stemming or lemmatization. During tokenization, each sentence containing product reviews is split into words. For each word, the lemmatization steps are carried out. Through stemming, the root words are extracted from any text words, but sometimes it results in stemming errors that lead to invalid words, which can cause misclassification problems. But lemmatization step not only finds the root word, but also compares dictionary words to find the valid words. For example, the term “operating” can be stemmed as “oper” while lemmatization results in “operate”. However, the lemmatization process is time consuming than stemming. In the proposed method, Wordnet is used to perform lemmatization.

2.1.2 Aspects extraction

In Aspect extraction step, the features of the specific domain are defined and are maintained as Target Entities in the form of vectors. For example, the target entities are Camera, OS, Battery etc. The vector elements for the camera are: {clarity, focus, resolution, modes etc}. The vector size is variable depending on the target entity under consideration. The noun and noun phrases are identified from the reviews and compared with the target entity and extracted as the aspects. The review sentences such as: ‘The camera of this phone is good’, ‘Battery capacity of one plus 7T pro is endurance on a single charge’, ‘the cost of iPhone 11 is too high’ brings out the aspects like camera, battery, capacity, charge, cost. Here, the aspect ‘capacity’ comes under storage entity and ‘charge’ comes under battery entity. Likewise, the aspects are extracted from all product reviews of the dataset.

2.1.3 Feature extraction

Only the relevant features are to be extracted from the reviews and fed into the ANN to reduce the complexity of the proposed classification model. These features include the combination of TF-IDF, positive and negative score of the aspect which is represented as:

$F(a) = \{p(a), n(a), TFIDF(a)\}$ where p, n represents the positive and negative score respectively. The term $TFIDF(a)$ refers to the statistical metric which indicate the significance of a particular product aspect in the dataset and is calculated from the Eq.(1). In this proposed work, opinion mining step employs *SentiWordnet* for finding the positive ($p(a)$) and negative scores $n(a)$ for each aspect a of a product. For Example, Battery of iPhone11= {145, 43} which means Battery of iPhone11 has positive score of 145 and negative score of 43, which reflects the cumulative sentiment positive/negative score of each aspect in the review set.

Term Frequency ($f_{TF}(a,r)$) refers to the frequency of the aspect occurrence of a product under consideration (number of times the aspect a occurs in product review set r). Inverse Document Frequency ($f_{IDF}(a,R)$) refers to the frequency of the same aspect associated with all the products of the review set (importance of an aspect from the entire review dataset R).

$$TFIDF(a) = f_{TF}(a,r) * f_{IDF}(a,R) \quad (1)$$

The TFIDF will be high when the aspect is rare over the entire product review sets in the database. After extracting the feature vector, the sentiment classification step is carried out using WOA based Adaptive ANN.

3. Proposed sentiment classification by SWOANN

ANN is the algebraic equivalent of the human brain that has complex layers which are connected and trained to recognize patterns. In sentiment analysis, ANN has gained a significant role in sentiment classification. WOA is a bio-motivated meta-heuristic optimization algorithm that imitates the food searching behavior of humpback whales. Humpback whales follow a bubble-netting mechanism (net created by blowing a series of bubbles) and communicate with other whales by creating some sort of sound once it finds the prey. The arithmetical modeling of the food searching and hunting behavior of humpback whales are of different stages Search for prey, Bubble-net formation, Prey encircling and Swim-up mechanism to swallow up the fish. The WOA algorithm may be experimented with many of the optimization problems.

In the proposed work, the features which are extracted from the feature extraction step are provided as input to the input layer of the ANN, and the sentiment (positive or negative classes) is classified as the output which will be available in the output layer. Moreover, the proposed

sentiment classification model employs Whale Optimization Algorithm for selecting the weights optimally based on the minimization of training error to improve the accuracy of the ANN. The structure of proposed SWOANN is as shown in Fig. 2.

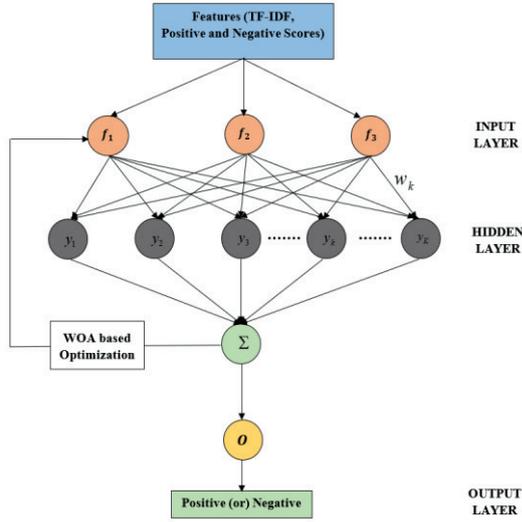


Fig. 2. Structure of proposed SWOANN model

3.1 Architectural framework of SWOANN

Let the inputs and outputs of the proposed novel architecture be,

$I = \{f_1, f_2, \dots, f_M\}$ representing the set of feature vector values ($M=3$) and $O = \{o_1, o_2, \dots, o_L\}$ representing the sentiment classes (positive/negative). The set of hidden layer units are represented as, $Y = \{y_1, y_2, \dots, y_k, \dots, y_K\}$. The working of SWOANN is explained as follows:

- The number of input and output neurons is equal to the size of the feature vector and the number of output classes, respectively.
- Feature vector is fed to the input layer and the neurons are initiated for hidden layer.
- As the initial step of WOA algorithm, random weights and bias are assigned to the proposed model. The weights and bias associated with the hidden and output units of the proposed network can be represented in the form of the vector \vec{w} whose length is represented as in equation (2):

$$|\vec{w}| = K * M + 2 * K + 1 \quad (2)$$

Where K represents the number of hidden units, M represents the number of input units and 1 for the bias associated with the output unit.

The initial population Z_w which represents the set of weight vectors of proposed training model (i.e. whales) is done randomly. Each weight vector is applied to the hidden and output units of the ANN and training error are computed using Feed-forward network principle.

- The input weight summation for the hidden unit (Y_k) and output unit O_l is calculated using the equation (3) and (4) respectively,

$$Y_k = \alpha_k + \sum_{m=0}^{M-1} w_{mk} f_m \quad (3)$$

$$O_l = \alpha_l + \sum_{k=0}^{K-1} w_{kl} S(k) \quad (4)$$

Where,

α_k, α_l represents the Bias associated with the k^{th} hidden unit and l^{th} output unit,

w_{mk} represents the weight of the connection from m^{th} input unit to k^{th} hidden unit,

w_{kl} represents the weight of the connection from k^{th} hidden unit to l^{th} output unit f_m represents output from m^{th} unit

$S(k)$ represents the output from the k^{th} hidden unit computed using equation (5):

The output from the x^{th} hidden/output unit can be obtained using the sigmoid function as in equation (5).

$$S(x) = \frac{1}{1 + e^{-x}} \quad (5)$$

- The fitness of the population/whales is assessed using the fitness function. The best weight vector among the generated population will be chosen during the fitness evaluation step. The fitness function ($BestFit(Z)$) can be defined as,

$$BestFit(Z) = \min(T_E) \quad (6)$$

Where,

$$T_E = \frac{1}{n} \sum_{i=1}^n (O_i^{Exp} - O_i^{Obt})^2 \quad (7)$$

T_E represents the training error of ANN, O_i^{Exp} and O_i^{Obt} represents the expected and obtained outputs, and n is the number of input samples. The training error is computed for all sets of weight vectors/population generated by WOA during each iteration. The weight vector with minimal training error is fixed as the fittest and the algorithm further tries to find out the better fittest value of further iterations.

- The location of the prey (better unknown optimal weight vector) is assumed as the position of better whale (weight vector) in each iteration. Based on the location of the better whale (with minimal training error), other whales in the population update their position(weights) to generate the next population using the equations (8) and (9),

$$\vec{S} = \left| \vec{D} \cdot \vec{Z}^*(i) - \vec{Z}(i) \right| \quad (8)$$

$$\vec{Z}(i+1) = \vec{Z}^*(i) - \vec{B} \cdot \vec{S} \quad (9)$$

Where, i denotes the current iteration, $\vec{Z}^*(i)$ indicates the weight vector (location) of the best whale obtained in the i^{th} iteration, $\vec{Z}(i+1)$ represents the new population generated.

Moreover, in the above equations (8) and (9), the

coefficient vector \vec{D} and \vec{B} are defined as:

$$\vec{B} = 2\vec{b} \cdot \vec{r1} - \vec{b} \quad (10)$$

$$\vec{D} = 2 \cdot \vec{r2} \quad (11)$$

Where, $\vec{r1}$ and $\vec{r2}$ denotes the random values in the range $[0,1]$, and \vec{b} is linearly decreased from 2 to 0 with the succession of the iteration. This variation impacts on \vec{B} , so the value of \vec{B} will be between $[-b, b]$ and it's decreased over successive iterations as the \vec{b} vector decreases (Shrinking Encircling Mechanism of WOA).

In contrast to the shrinking position update that is the spiral position update imitates the helical movements towards humpback whales, which are modeled as:

$$\vec{Z}(k+1) = \vec{S}' \cdot \exp^{ch} \cdot \cos(2\pi h) + \vec{Z}^*(k) \quad (12)$$

Where, $\vec{S}' = \left| \vec{Z}^*(k) - \vec{Z}(k) \right|$ represents the

distance between the x^{th} whale and the prey; c

- During this exploitation phase, the whales can choose any type of position update either shrinking or spiral. Hence, with 50% probability, the position update is modeled as,

$$\vec{Z}(k+1) = \begin{cases} \vec{S}' \cdot \exp^{ch} \cdot \cos(2\pi h) + \vec{Z}^*(k) & \text{for } rand \geq 0.5 \\ \vec{Z}^*(k) - \vec{B} \cdot \vec{S} & \text{for } rand < 0.5 \end{cases} \quad (13)$$

Where, the value of $rand$ is varied between $[0,1]$.

- During exploration phase, a random whale is chosen, and the location of prey is found according to its position. This can be represented as,

$$\vec{S} = \left| \vec{D} \cdot \vec{Z}_{arb} - \vec{Z} \right| \quad (14)$$

$$\vec{Z}(k+1) = \vec{Z}_{arb} - \vec{B} \cdot \vec{S} \quad (15)$$

Where, \vec{Z}_{arb} is the arbitrary whale selected from the population of whales.

- The above steps are repeated continuously until either maximum iteration is reached or no more better values are obtained. Once the training procedure is stopped, the training structure formed with the optimal set of weights is saved. Later, the trained Adaptive ANN with WOA can be utilized to predict the sentiment for any set of product reviews.

3.2 SWOANN algorithm for classification

The algorithmic view of proposed SWOANN model for classification is given as follows:

```

Algorithm doWithSWOANN
//Input: I, T, k, p, max, lb, ub
//I-IP feature vector, T-Target labels, k - #hidden units
//p-Size of population, max-maximum number of iterations
//|w|-Number of weights and bias used in network
//lb - lower bound, ub-upper bound
//Output: Γ - trained network model
{
    m = |I|
    Γ = constructFFN(m, k)
    //construct neural network as per figure(2)
    for each i in p
        for each j in |w|
            Z(i, j) = init(lb, ub)
        for each z in Z
            Γ.weight_bias = z
            TE(z) = findTE(Γ, I, T) //use eq(7)
            minTE = min(TE)
            Z* = whale z with minTE
        bestPop = Z
    it = 1
    while it <= max
        b = 2 - (it * ((2) / max))
        f = -1 + (it * ((-1) / max))
        for each i in p
            computeCoeffB() //use eq(10)
            computeCoeffD() //use eq(11)
            pr = random number in range[0,1]
    }
    
```

```

for each j in |w|
  if pr < 0.5
    if abs(B) >= 1
      updateWeight(Z(i, j)) //use eq(15)
    elseif abs(B) < 1
      updateWeight(Z(i, j)) //use eq(9)
    elseif pr >= 0.5
      updateWeight(Z(i, j)) //use eq(12)
// Boundary checking whales position lie within UB and LB
for each i in p
  for each j in |w|
    if Z(i, j) < lb
      Z(i, j) = lb
    elseif Z(i, j) > ub
      Z(i, j) = ub
// evaluating fitness of whales in the population
// by computing the training error
for each z ∈ Z
  Γ.weight_bias = z
  TE(z) = findTE(Γ, I, T);
// updating best population and minimum training
// error of population
for each i in p
  if TE(Z(i)) < bestPopTE(i)
    bestPop(i) = Z(i)
    bestPopTE(i) = TE(Z(i))
tempMinErr = min(bestPopTE)
// updating Z* and minimum training error
if tempMinErr < minTE
  Z* = whale with tempMinErr
  minTE = tempMinErr
Z = bestPop
increment it
Γ.weight_bias = Z*
}

```

4. Experimental results and analysis

The results were obtained from the proposed Aspect based Sentiment Classification model implemented in a PC with the associated details: CPU Intel® Core i52.4 GHz, 64-bit operating system, Microsoft® Windows 10, 8 GB of RAM, Matlab 2018b and Python 3.7. Here, all experiments were carried out using the set of 3500 mobile phone reviews collected from the Amazon and Flipkart. The models include iPhone 11 Pro Max, iPhone 11, Google Pixel 4, Xiaomi Mi 10, Samsung Galaxy S20+, Poco X2, Realme X50 Pro 5G, OnePlus 7T Pro, Realme X, Samsung Galaxy Note 10+ and Vivo V19. Totally 15 numbers of aspects was identified with the mobile phone reviews. The aspects are {Battery, Cost, Camera, OS, Processor, Screen, Size, Storage, Wi-Fi, GPS, Bluetooth,

Network, Apps, Color and User Interface}. Opinion mining is carried out for the extracted aspects for every individual product. The opinion about the aspects is computed in terms of the positive and negative scores. The TF-IDF score is computed in feature extraction phase and the feature vector is computed for the aspects. Sample feature vector for the aspects of the OnePlus 7T Pro mobile phone is given in Table 1,

Table 1
Feature vector for OnePlus 7T Pro

Aspects	Positive Score	Negative Score	TF-IDF
Battery	279	143	0.341972531
Cost	57	50	0.183082359
Camera	278	45	0.281588664
OS	75	10	0.202128048
Processor	22	8	0.083658555
Screen	313	24	0.374712323
Size	6	5	0.040755178
Storage	4	0	0.024114263
Wifi	9	4	0.053956442
GPS	2	3	0.027098092
Bluetooth	20	2	0.08579152
Network	6	6	0.047897965
Apps	31	19	0.15087102
Color	21	6	0.089564825

Similarly feature vector for the aspects of all products are computed. The computed feature vectors with class label are given as input to the SWOANN. The performance of the proposed Aspect based Sentiment classification model is analyzed by using some of the quality metrics like Precision, Recall, F-Measure and Accuracy. Moreover, the comparison is made with the existing methods like traditional ANN and SVM (Support Vector Machine) [23].

$$\text{Precision} = \frac{TP}{TP + FP} \quad (16)$$

$$\text{Recall} = \frac{TP}{TP + FN} \quad (17)$$

$$\text{F-Score} = 2 \times \frac{\text{Precision} \times \text{Recall}}{\text{Precision} + \text{Recall}} \quad (18)$$

$$\text{Accuracy} = \frac{TP + TN}{TP + FP + FN + TN} \quad (19)$$

The correctness of the classifier is measured by using precision measure. Higher the value of precision indicates that the data is classified with less false positives. The completeness or sensitivity of a classifier is measured

using recall measure. Higher the value of recall indicates that the data is classified with less false negatives. F1-Score combines both precision and recall and measure classifier accuracy. Higher the value of F1-Score indicates that the data is classified with less false positives and less false negatives. The results of the experiments were compared with the state of art ANN and SVM classifier models and are presented in the form of charts Fig. 3 to Fig. 6 for the performance metrics such as precision, recall, F-measure and accuracy respectively.

As the problem space has only two classes to be separated, the linear kernel SVM classifier is used for the experiment with default parameter setting. The ANN with backpropagation approach is used in the experiment with five hidden layers and learning rate is set at 0.3. For the proposed work, the number of hidden units is set to five and number of whales is set to 25.

By using the above parameters, the comparison between the ANN, SVM and the proposed method is carried out. This consistency is maintained for the whole dataset. The average accuracy of the proposed Sentiment Whale Optimized Adaptive Neural Network (SWOANN) algorithm are 84% and is higher compared to the accuracy of ANN method is about 75% and SVM is about 78.5%.

From the above analysis, it is observed that the results obtained for all the mobile products of the proposed work are most promising.

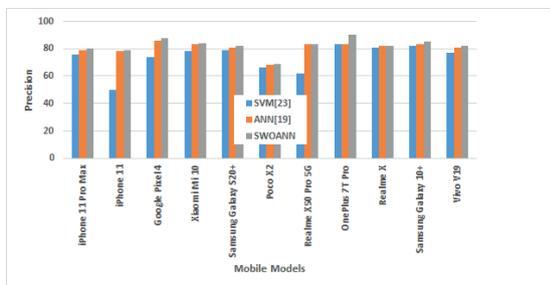


Fig. 3. Comparative analysis of precision of proposed SWOANN with ANN and SVM



Fig. 4. Comparative analysis of recall of proposed SWOANN with ANN and SVM

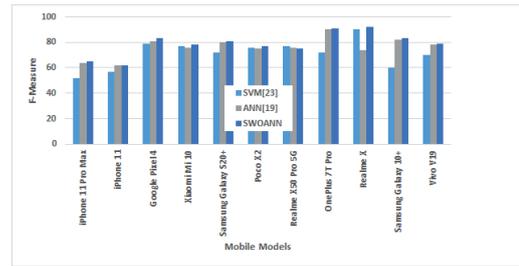


Fig. 5. Comparative analysis of F-Measure of proposed SWOANN with ANN and SVM

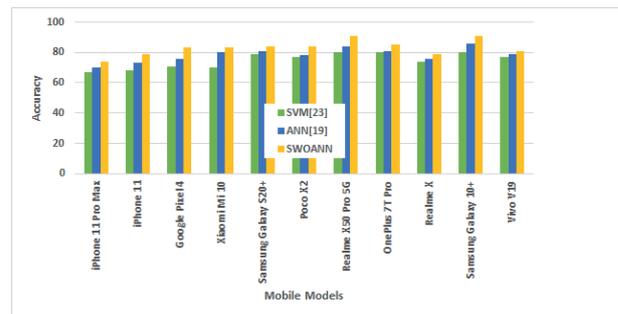


Fig. 6. Comparative analysis of accuracy of proposed SWOANN with ANN and SVM.

5. Conclusion

In this proposed research work, Aspect Based Sentiment Classification using SWOANN model has been developed and tested for classifying the sentiment of key aspects of products and services. The accuracy of sentiment classification of the product and services has been improved by the optimal selection of weights of neurons of the proposed model. The performance analysis is carried out in terms of Precision, Recall, F-Measure and Accuracy and compared with existing ANN and SVM methods. The computational speed and accuracy of the proposed approach for sentiment classification has been improved. From the above analysis, it is observed that the results obtained for all the mobile products of the proposed work are most promising. Moreover, the rate of classification of the classifier has been improved by using the key features such as the Positive Opinion Score, Negative Opinion Score and the TF-IDF. The proposed model can be compatible with any sentiment classification problem of products and services in the field of E-commerce applications.

Compliance with ethical standards

Conflict of interest: The authors declare that there is no conflict of interest.

Acknowledgments. The authors would like to express their sincere thanks and gratitude to the Management and Principal of Mepco Schlenk Engineering College (Autonomous), Sivakasi, Tamil Nadu, India, for supporting us with State-of-art facilities in collaboration with Anna University Chennai, Tamil Nadu, to carry out our research work at the Mepco Research Centre.

REFERENCES

- [1] L. Cui, S. Huang, F. Wei, C. Tan, C. Duan, and M. Zhou, "Superagent: A customer service chatbot for E-commerce websites," in *ACL 2017 - 55th Annual Meeting of the Association for Computational Linguistics, Proceedings of System Demonstrations*, 2017, pp. 97–102, doi: 10.18653/v1/P17-4017.
- [2] M. Afzaal, M. Usman, and A. Fong, "Tourism mobile app with aspect-based sentiment classification framework for tourist reviews," *IEEE Trans. Consum. Electron.*, vol. 65, no. 2, pp. 233–242, 2019, doi: 10.1109/TCE.2019.2908944.
- [3] M. S. Akhtar, T. Garg, and A. Ekbal, "Multi-task learning for aspect term extraction and aspect sentiment classification," *Neurocomputing*, vol. 398, pp. 247–256, 2020, doi: 10.1016/j.neucom.2020.02.093.
- [4] M. Pontiki, D. Galanis, J. Pavlopoulos, H. Papageorgiou, I. Androutsopoulos, and S. Manandhar, "SemEval-2014 Task 4: Aspect Based Sentiment Analysis," in *Proceedings of the 8th International Workshop on Semantic Evaluation (SemEval 2014)*, 2014, pp. 27–35, doi: 10.3115/v1/s14-2004.
- [5] M. Ghiassi, J. Skinner, and D. Zimbra, "Twitter brand sentiment analysis: A hybrid system using n-gram analysis and dynamic artificial neural network," *Expert Syst. Appl.*, vol. 40, no. 16, pp. 6266–6282, 2013, doi: 10.1016/j.eswa.2013.05.057.
- [6] M. Mladenović, J. Mitrović, C. Krstev, and D. Vitas, "Hybrid sentiment analysis framework for a morphologically rich language," *J. Intell. Inf. Syst.*, vol. 46, no. 3, pp. 599–620, 2016, doi: 10.1007/s10844-015-0372-5.
- [7] Y. Kai, Y. Cai, H. Dongping, J. Li, Z. Zhou, and X. Lei, "An effective hybrid model for opinion mining and sentiment analysis," in *IEEE International Conference on Big Data and Smart Computing, BigComp 2017*, 2017, pp. 465–466, doi: 10.1109/BIGCOMP.2017.7881759.
- [8] F. Iqbal *et al.*, "A Hybrid Framework for Sentiment Analysis Using Genetic Algorithm Based Feature Reduction," *IEEE Access*, vol. 7, pp. 14637–14652, 2019, doi: 10.1109/ACCESS.2019.2892852.
- [9] J. R. Alharbi and W. S. Alhalabi, "Hybrid approach for sentiment analysis of twitter posts using a dictionary-based approach and fuzzy logic methods: Study case on cloud service providers," *Int. J. Semant. Web Inf. Syst.*, vol. 16, no. 1, pp. 116–145, 2020, doi: 10.4018/IJSWIS.2020010106.
- [10] S. C. Cagan, M. Aci, B. B. Buldum, and C. Aci, "Artificial neural networks in mechanical surface enhancement technique for the prediction of surface roughness and microhardness of magnesium alloy," *Bull. Polish Acad. Sci. Tech. Sci.*, vol. 67, no. 4, pp. 729–739, 2019, doi: 10.24425/bpasts.2019.130182.
- [11] B. Paprocki, A. Pregowska, and J. Szczepanski, "Optimizing information processing in brain-inspired neural networks," *Bull. Polish Acad. Sci. Tech. Sci.*, vol. 68, no. 2, pp. 225–233, 2020, doi: 10.24425/bpasts.2020.131844.
- [12] I. Rojek and E. Dostatni, "Machine learning methods for optimal compatibility of materials in ecodesign," *Bull. Polish Acad. Sci. Tech. Sci.*, vol. 68, no. 2, pp. 199–206, 2020, doi: 10.24425/bpasts.2020.131848.
- [13] S. Kirkpatrick, C. D. Gelatt, and M. P. Vecchi, "Optimization by simulated annealing," *Science (80-)*, vol. 220, no. 4598, pp. 671–680, 1983, doi: 10.1126/science.220.4598.671.
- [14] F. F. Moghaddam, R. F. Moghaddam, and M. Cheriet, "Curved Space Optimization: A Random Search based on General Relativity Theory," pp. 1–16, 2012, [Online]. Available: <http://arxiv.org/abs/1208.2214>.
- [15] S. Mirjalili and A. Lewis, "The Whale Optimization Algorithm," *Adv. Eng. Softw.*, vol. 95, pp. 51–67, 2016, doi: 10.1016/j.advengsoft.2016.01.008.
- [16] T. Brychcin, M. Konkol, and J. Steinberger, "UWB: Machine Learning Approach to Aspect-Based Sentiment Analysis," in *Proc. 8th Int. Workshop Semantic Eval. (SemEval) (2014)*, 2015, no. SemEval, pp. 817–822, doi: 10.3115/v1/s14-2145.
- [17] J. Singh, G. Singh, and R. Singh, "Optimization of sentiment analysis using machine learning classifiers," *Human-centric Comput. Inf. Sci.*, vol. 7, no. 1, 2017, doi: 10.1186/s13673-017-0116-3.
- [18] M. Al-Smadi, O. Qawasmeh, M. Al-Ayyoub, Y. Jararweh, and B. Gupta, "Deep Recurrent neural network vs. support vector machine for aspect-based sentiment analysis of Arabic hotels' reviews," *J. Comput. Sci.*, vol. 27, pp. 386 – 393, 2018, doi: 10.1016 / j.jocs.2017.11.006.
- [19] P. Kalarani and S. Selva Brunda, "Sentiment analysis by POS and joint sentiment topic features using SVM and ANN," *Soft Comput.*, vol. 23, no. 16, pp. 7067–7079, 2019, doi: 10.1007/s00500-018-3349-9.
- [20] L. Haghnegahdar and Y. Wang, "A whale optimization algorithm-trained artificial neural network for smart grid cyber intrusion detection," *Neural Comput. Appl.*, vol. 32, no. 13, pp. 9427–9441, 2020, doi: 10.1007/s00521-019-04453-w.
- [21] J. Zhou, Q. Chen, J. X. Huang, Q. V. Hu, and L. He, "Position-aware hierarchical transfer model for aspect-level sentiment classification," *Inf. Sci. (Ny)*, vol. 513, pp. 1–16, 2020, doi: 10.1016/j.ins.2019.11.048.
- [22] A. K. J and S. Abirami, "Aspect-based opinion ranking framework for product reviews using a Spearman's rank correlation coefficient method," *Inf. Sci. (Ny)*, vol. 460–461, pp. 23–41, 2018, doi: 10.1016/j.ins.2018.05.003.
- [23] C. Cortes and V. Vapnik, "Support-Vector Networks," *Mach. Learn.*, vol. 20, pp. 273–297, 1995, doi: 10.1109/64.163674.